



 **COMFORSER**
2017 Tire Catalogue

PCR TIRE SERIES
Product Mapping



CF3000

THRUSTER

CF1000

CF4000

CF2000

CF710

CF720

CF600

CF930



CF700

CF500

CF510

CF610

CF300

SPORTS K4

CF950

CF970

CF900

CF350

CF360

RUN-FLAT
Technology



RF500

COLORED TIRE SERIES
Product Mapping





CF3000		THRUSTER	CF1000	CF4000	CF2000	CF710	CF720	CF600	CF930
M/T		Off-Road	A/T	SUV/CUV	H/T	UHP	UHP	HP	Winter HP
255/55R19	35x12.50R15LT	31X10.50-16LT	P215/75R15	225/60R18	215/75R15 205/60R16	215/55R16 245/40ZR18	305/45ZR22	155/70R13	165/70R13
215/85R16LT	35x12.50R17LT	33X10.50-16LT	P235/75R15	245/60R18	225/75R15 215/60R17	225/55R16 255/40ZR18	305/40ZR22	165/70R13	165/70R14
235/85R16LT	35x12.50R18LT	35X10.50-16LT	P215/70R16	225/55ZR18	235/75R15 225/60R17	185/50R16 225/40ZR19	265/35ZR22	175/70R13	175/70R14
215/75R15LT	35x12.50R20LT		P235/70R16	255/55ZR18	265/75R16 235/60R18	195/50R16 235/40ZR19	245/30ZR22	165/70R14	185/70R14
235/75R15LT	35x12.50R22LT		P245/70R16	255/55ZR19	205/70R14 265/60R18	205/50R16 245/40ZR19	295/35ZR24	175/70R14	175/65R14
225/75R16LT	35x12.50R24LT		255/70R16	275/55ZR20	205/70R15 275/60R20	195/45R16 245/35ZR19	305/35ZR24	185/70R14	185/65R14
245/75R16LT	37x12.50R17LT		P265/70R16	245/50ZR18	215/70R16 235/55R17	205/45R16 295/30ZR19	255/30ZR24	195/70R14	175/65R15
265/75R16LT	35x13.50R20LT		P265/65R17	265/50ZR20	225/70R16 215/55R18	215/55R17 255/35ZR20	295/30ZR26	215/70R15	185/65R15
285/75R16LT	37x13.50R20LT		255/60R18	285/50ZR20	235/70R16 235/55R18	225/55R17	305/30ZR26	175/65R14	195/65R15
315/75R16LT	37x13.50R22LT		285/60R18	275/45ZR20	245/70R16 235/50R18	235/55R17	275/25ZR26	185/65R14	205/65R15
305/70R16LT	37x13.50R24LT		265/50R20	295/35ZR21	255/70R16 245/70R17LT	205/50R17		175/65R15	185/60R14
265/70R17LT	37x13.50R26LT		235/85R16LT		265/70R16 265/70R17LT	225/50R17		185/65R15	185/60R15
285/70R17LT	40x15.50R24LT		245/75R16LT		275/70R16 235/60R17	235/50R17		195/65R15	195/60R15
275/65R18LT			265/75R16LT		205/65R16	245/45ZR17		205/65R15	205/60R16
285/65R18LT			285/75R16LT		215/65R16	255/45ZR17		215/65R15	215/60R16
31x10.50R15LT			265/70R16LT		225/65R17	215/45ZR18		185/60R14	195/55R15
32x11.50R15LT			265/70R17LT		235/65R17	225/45ZR18		185/60R15	195/55R16
33x12.50R15LT			285/70R17LT		245/65R17	235/45ZR18		195/60R15	205/55R16
33x12.50R17LT			30x9.50R15LT		255/65R17	255/45ZR18		205/60R15	215/55R16
33x12.50R18LT			31x10.50R15LT		265/65R17	205/40ZR18		215/60R15	225/55R16
33x12.50R20LT			35x12.50R17LT		275/65R17	215/40ZR18		225/60R15	215/55R17
33x12.50R22LT			35x12.50R18LT		285/65R17			195/60R16	225/55R17
33x12.50R24LT			35x12.50R20LT		275/65R18			205/60R16	195/50R15
								215/60R16	205/50R17
								225/60R16	225/50R17
								235/60R16	
36 Sizes	3 Sizes	23 Sizes	11 Sizes	36 Sizes	29 Sizes	10 Sizes	26 Sizes	25 Sizes	
Page:11-12	Page:13-14	Page:15-16	Page:17-18	Page:19-20	Page:21-22	Page:23-24	Page:27-28	Page:29-30	

Note: WSW: White Sidewall . OWL: Outlined White Letter.



CF700	CF500	CF510	CF610	CF300	SPORTS K4	CF950	CF970	CF900	CF350	CF360
UHP	HP	HP	HP	Commercial/VAN	HP	Winter SUV/UHP	Winter Studdable	Winter HP	Commercial/VAN	Winter Commercial/VAN
										
205/45ZR17	185/55R15	185/70R13 205/55R15	165/70R13	185R14C 8PR	185/75R14	215/70R16	195/65R15	185/65R14	155R13C	185R14C
215/45ZR17	195/55R15	185/70R14 195/50R15	175/70R13	WSW 185R14C 8PR	155/65R14	245/70R16	185/75R16C 8PR	185/65R15	165R13C	215/75R14C
225/45ZR17	205/55R15	195/70R14 205/50R15	165/65R13	195R14C 8PR	165/65R14	215/65R16		195/65R15	165R14C	185/75R16C
235/45ZR17	195/55R16	205/70R14 195/60R16	165/70R14	WSW 195R14C 8PR	165/65R15	225/65R17		205/65R15	175R13C	195/75R16C
245/45ZR18	205/55R16	215/70R14 205/60R16	175/70R14	205R14C 8PR	165/60R14	235/65R17		215/65R16	175/75R16C	195/70R15C
245/45ZR19	215/55R16	185/65R14 215/60R16	175/65R14	195R15C 8PR	155/60R15	265/65R17			215/75R16C	215/70R15C
195/40ZR17	225/55R16	195/65R14 225/60R16	165/55R14	WSW 195R15C 8PR	165/60R15	215/60R17			165/70R13C	225/70R15C
205/40ZR17	205/55R17	185/60R14 235/60R16	175/65R15	WSW 205/75R14C 8PR	175/60R15	225/60R17			165/70R14C	195/65R16C
215/40ZR17	215/55R17	195/60R14 205/55R16	165/60R15	WSW 205/75R15C 8PR	165/55R14	235/60R17			175/70R14C	205/65R16C
245/40ZR17	225/55R17	205/70R15	165/55R15	185/75R16C 8PR	165/55R15	235/60R18			185/70R14C	215/65R16C
225/40ZR18	235/55R17	215/70R15		195/75R16C 8PR	175/55R15	255/55R18			175/65R14C	235/65R16C
235/40ZR18	195/50R15	185/65R15		WSW 205/75R16C 8PR	165/50R15	255/50R19			205/65R15C	
255/40ZR19	205/50R15	195/65R15		225/75R16C 10PR	165/50R16	225/45R17			215/60R16C	
275/40ZR19	185/50R16	205/65R15		195/70R15C 8PR	165/45R15	245/45R18			215/60R17C	
245/40ZR20	195/50R16	215/65R15		WSW 205/70R15C 8PR	165/45R16	225/40R18			235/60R17C	
215/35ZR18	205/50R16	185/60R15		225/70R15C 8PR	165/40R16					
235/35ZR19	225/50R16	195/60R15		195/65R16C 8PR						
225/35ZR20	205/50R17	205/60R15		205/65R16C 8PR						
245/35ZR20	215/50R17	215/60R15		215/65R16C 8PR						
275/35ZR20	225/50R17	225/60R15		225/65R16C 8PR						
225/30ZR20	195/45R15	185/55R15		235/65R16C 8PR						
		195/55R15								
21 Sizes	21 Sizes	31 Sizes	10 Sizes	21 Sizes	16 Sizes	15 Sizes	2 Sizes	5 Sizes	15 Sizes	11 Sizes
Page:31	Page:32	Page:33	Page:34	Page:35	Page:36	Page:37	Page:38	Page:39	Page:40	Page:41

Note: WSW: White Sidewall . OWL: Outlined White Letter.

CF3000 M/T



Applicable models



Unique shoulder blocks

protection strip and 3D side-wall, enhancing traction in muddy conditions and snowy conditions.



Uni-directional depth pattern groove, increasing traction



specifications

coverage from 15 to 26 inch; maximum specification, maximum size



Shoulder design for stone prevention under severe road conditions



Solidify tire body for protection

Drainage and mud shedding



Size	LI/SS	PR	Rim	Dimensions (mm)			Max. Load (kg)		Max. Press (kPa)	Size	LI/SS	PR	Rim	Dimensions (mm)			Max. Load (kg)		Max. Press (kPa)
				OD	SW	NSD	Single	Dual					OD	SW	NSD	Single	Dual		
255/65R19	111R XL	—	8.0	763	265	15.0	1090	—	340	33x12.50R18LT	118Q	10PR	10.0	832	318	15.0	1320	—	450
215/85R16LT	115/112Q	10PR	6.0	778	216	14.0	1215	1120	550	33x12.50R20LT	114Q	10PR	10.0	832	318	15.0	1180	—	450
235/85R16LT	120/116Q	10PR	6.5	812	235	15.0	1380	1260	550	33x12.50R22LT	109Q	10PR	10.0	832	318	15.0	1030	—	450
215/75R15LT	100/97Q	6PR	6.0	709	216	14.0	800	730	350	33x12.50R24LT	104Q	10PR	10.0	832	318	15.0	900	—	450
235/75R15LT	104/101Q	6PR	6.5	739	235	14.0	900	825	350	35x12.50R15LT	113Q	6PR	10.0	883	318	16.0	1150	—	250
225/75R16LT	115/112Q	10PR	6.0	750	223	14.0	1215	1120	550	35x12.50R17LT	121Q	10PR	10.0	883	318	16.0	1450	—	450
245/75R16LT	120/116Q	10PR	7.0	780	248	15.0	1380	1260	550	35x12.50R18LT	123Q	10PR	10.0	883	318	16.0	1550	—	450
265/75R16LT	123/120Q	10PR	7.5	810	267	15.0	1550	1400	550	35x12.50R20LT	121Q	10PR	10.0	883	318	16.0	1450	—	450
285/75R16LT	126/123Q	10PR	8.0	840	286	15.0	1700	1550	550	35x12.50R22LT	117Q	10PR	10.0	883	318	16.0	1285	—	450
315/75R16LT	127/124Q	10PR	8.5	884	313	15.0	1750	1600	450	35x12.50R24LT	113Q	10PR	10.0	883	318	16.0	1150	—	450
305/70R16LT	118/115Q	8PR	9.0	840	311	15.0	1320	1215	350	37x12.50R17LT	124Q	8PR	10.0	934	318	16.0	1600	—	350
265/70R17LT	121/118Q	10PR	8.0	810	272	15.0	1450	1320	550	35x13.50R20LT	124Q	10PR	10.0	883	345	16.0	1600	—	450
285/70R17LT	121/118Q	8PR	8.5	838	292	15.0	1450	1320	450	37x13.50R20LT	127Q	10PR	11.0	934	345	16.0	1750	—	450
275/65R18LT	123/120Q	10PR	8.0	821	279	15.0	1550	1400	550	37x13.50R22LT	123Q	10PR	11.0	934	345	16.0	1550	—	450
285/65R18LT	125/122Q	10PR	8.5	833	292	15.0	1650	1500	550	37x13.50R24LT	120Q	10PR	11.0	934	345	16.0	1400	—	450
31x10.50R15LT	109Q	6PR	8.5	781	268	15.0	1030	—	350	37x13.50R26LT	117Q	10PR	11.0	934	345	16.0	1285	—	450
32x11.50R15LT	113Q	6PR	9.0	807	290	15.0	1150	—	350	40x15.50R24LT	128P	10PR	12.0	1010	390	16.0	1800	—	450
33x12.50R15LT	108Q	6PR	10.0	832	318	15.0	1000	—	250										
33x12.50R17LT	114Q	8PR	10.0	832	318	15.0	1180	—	350										

THRUSTER *Off-Road Competition*

DESIGNED FOR COMPETITION
NEW

Applicable models



Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)	UTQG
				OD	SW	NSD	Single	Dual		
31X10.50-16LT	—	—	—	—	—	—	—	—	—	—
33X10.50-16LT	—	—	—	—	—	—	—	—	—	—
35X10.50-16LT	—	—	—	—	—	—	—	—	—	—

Widen flat pattern block with depth groove

having stronger pressure resistance and better drainage and mud shedding ability

COC China Off-road Championship

Anti pressure, cutting resistance, durability

Jig-saw tread pattern

helps to improve tire's gripping and driving performance

CF1000 A/T

DESIGNED FOR ALL TERRAIN
HOT

Applicable models



Complete specifications



3D block design enhances the grip ability on both wet and dry road, protect the thread against injury under severe road conditions



Double carcasses, obdurability



Sidewall protection, beauty



Sidewall	Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)	UTQG
					OD	SW	NSD	Single	Dual		
OWL	P215/75R15	100S	—	6.0	703	216	10.5	790	—	300	420AB
OWL	P235/75R15	105S	—	6.5	733	235	10.8	920	—	300	420AB
OWL	P215/70R16	99T	—	6.5	708	221	10.5	775	—	300	420AB
OWL	P235/70R16	104T	—	7.0	736	240	10.8	900	—	300	420AB
OWL	P245/70R16	106S	—	7.0	750	248	10.8	950	—	300	420AB
OWL	255/70R16	111T	—	7.5	764	260	10.8	1090	—	300	420AA
OWL	P265/70R16	111T	—	8.0	778	272	10.8	1090	—	300	420AB
OWL	P265/65R17	110T	—	8.0	776	272	10.8	1060	—	300	420AB
OWL	255/60R18	112H XL	—	7.5	763	260	10.8	1120	—	340	420AA
OWL	285/60R18	116T	—	8.5	799	292	10.8	1250	—	300	420AB
OWL	265/50R20	107T	—	8.5	774	277	9.8	975	—	300	420AB
OWL	235/85R16LT	120/116S	10PR	6.5	806	235	13.0	1380	1260	550	—
OWL	245/75R16LT	120/116S	10PR	7.0	774	248	13.0	1380	1260	550	—
OWL	265/75R16LT	123/120S	10PR	7.5	804	267	13.0	1550	1400	550	—
OWL	285/75R16LT	126/123S	10PR	8.0	834	286	13.0	1700	1550	550	—
OWL	265/70R16LT	121/118S	10PR	8.0	778	272	13.0	1450	1320	550	—
OWL	265/70R17LT	121/118S	10PR	8.0	804	272	13.0	1450	1320	550	—
OWL	285/70R17LT	121/118S	10PR	8.5	832	292	13.0	1450	1320	550	—
OWL	30 × 9.50R15LT	104R	6PR	7.5	750	240	13.0	900	—	350	—
OWL	31 × 10.50R15LT	109S	6PR	8.5	775	268	13.0	1030	—	350	—
OWL	35 × 12.50R17LT	121S	10PR	10.0	877	318	13.0	1450	—	450	—
OWL	35 × 12.50R18LT	123S	10PR	10.0	877	318	13.0	1550	—	450	—
OWL	35 × 12.50R20LT	121S	10PR	10.0	877	318	13.0	1450	—	450	—

CF4000 SUV/CUV



Applicable models



Asymmetric tread design

for excellent riding stability and precise handling on wet roads.



4 Circumferential grooves

for excellent water evacuation, minimize the risk of aquaplaning at high speed.



Various sipes and Lateral grooves

efficiently reduce the rinding noise.



Silica tread compound

for lower rolling resistance and better grip performance.



Size				Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
	LI/SS	Std/XL	Rim	OD	SW	NSD			
225/60R18	104V	XL	6.5	727	228	8.3	900	340	320AA
245/60R18	105V	Std	7.0	751	248	8.3	925	300	320AA
225/55ZR18	102W	XL	7.0	705	233	8.3	850	340	320AA
255/55ZR18	109W	XL	8.0	737	265	8.3	1030	340	320AA
255/55ZR19	111W	XL	8.0	763	265	8.3	1090	340	320AA
275/55ZR20	117W	XL	8.5J	810	284	8.3	1285	340	320AA
245/50ZR18	104W	XL	7.5J	703	253	8.3	900	340	320AA
265/50ZR20	111W	XL	8.5J	774	277	8.3	1090	340	320AA
285/50ZR20	118W	XL	9J	794	297	8.3	1250	340	320AA
275/45ZR20	110W	XL	9.0	756	273	8.5	1060	340	320AA
295/35ZR21	107W	XL	10.5	739	301	8.5	975	340	320AA

CF2000 H/T

FOR HIGHWAY TERRAIN
HOT

Applicable models



Designed for paved road use

Zigzag sipes on the shoulder block and tread

are for reducing noise level and improving traction in both wet and dry conditions.

4 circumferential grooves

for excellent water evacuation for good wet traction.

Wider center rib

for stable handling at high speed straight line driving.



Size	LI/SS	PR	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)	UTQG	Size	LI/SS	PR	Dimensions (mm)			Max.Load (kg)		Max. Press (kPa)	UTQG
			OD	SW	NSD	Single	Dual						OD	SW	NSD	Single	Dual		
215/75R15	100H	6.0	703	216	8.5	800	—	300	420AA	265/65R17	112H	8.0	776	272	8.8	1120	—	300	420AA
225/75R15	102H	6.0	719	223	8.5	850	—	300	420AA	275/65R17	119H XL	8.0	790	279	8.8	1360	—	340	420AA
235/75R15	105H	6.5	733	235	8.5	925	—	300	420AA	285/65R17	116H	8.5	802	292	8.8	1250	—	300	420AA
265/75R16	116T	7.5	804	267	8.8	1250	—	300	420AA	275/65R18	116H	8.0	815	279	8.8	1250	—	300	420AA
205/70R14	95H	6.0	644	209	8.5	690	—	300	420AA	205/60R16	92V	6.0	652	209	8.5	630	—	300	420AA
205/70R15	96H	6.0	669	209	8.5	710	—	300	420AA	215/60R17	96V	6.5	690	221	8.5	710	—	300	420AA
215/70R16	100H	6.5	708	221	8.5	800	—	300	420AA	225/60R17	103H XL	6.5	702	228	8.5	875	—	340	420AA
225/70R16	103H	6.5	722	228	8.5	875	—	300	420AA	235/60R18	107H XL	7.0	739	240	8.5	975	—	340	420AA
235/70R16	106H	7.0	736	240	8.5	950	—	300	420AA	265/60R18	114H XL	8.0	775	272	8.8	1180	—	340	420AA
245/70R16	107H	7.0	750	248	8.5	975	—	300	420AA	275/60R20	115H	8.0	838	279	8.8	1215	—	300	420AA
255/70R16	111H	7.5	764	260	8.8	1090	—	300	420AA	235/55R17	103W XL	7.5	690	245	8.5	875	—	340	420AA
265/70R16	112H	8.0	778	272	8.8	1120	—	300	420AA	215/55R18	99W XL	7.0	693	226	8.5	775	—	340	420AA
275/70R16	114H	8.0	792	279	8.8	1180	—	300	420AA	235/55R18	104W XL	7.5	715	245	8.5	900	—	340	420AA
205/65R16	95H	6.0	672	209	8.5	690	—	300	420AA	235/50R18	101W XL	7.5	693	245	8.5	825	—	340	420AA
215/65R16	102H XL	6.5	686	221	8.5	850	—	340	420AA	245/70R17LT	119/116S 10PR	7.0	776	248	10.8	1360	1250	550	—
225/65R17	102H	6.5	724	228	8.5	850	—	300	420AA	265/70R17LT	121/118S 10PR	8.0	804	272	10.8	1450	1320	550	—
235/65R17	108H XL	7.0	738	240	8.5	1000	—	340	420AA	235/60R17	102H	7.0	714	240	8.5	850	—	300	420AA
245/65R17	107H	7.0	750	248	8.5	975	—	300	420AA										
255/65R17	110H	7.5	764	260	8.8	1060	—	300	420AA										

CF710 UHP

ULTRA
HIGH
PERFORMANCE
NEW

Applicable
models



3+1 Longitudinal grooves
enhance the wet grip performance to prevent the aquaplaning.

Asymmetric tread design
outside with strong shoulder for good turning stability, inside shoulder with multisipes for excellent water drainage.

Variable pitch design
from inside and outside greatly reduces the riding noise.

Wider centre rib
for stable handling with straight line driving at high speed.



Size	L/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG	Size	L/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	UTQG	
				OD	SW	NSD								OD	SW	NSD				
215/55R16	97V	XL	7J	642	226	8.0	730	340	380 A A	205/40ZR18	86W	XL	7.5J	621	212	8.0	530	340	380 A A	
225/55R16	95V	Std	7J	654	233	8.0	690	300	380 A A	215/40ZR18	89W	XL	7.5J	629	218	8.0	580	340	380 A A	
185/50R16	81V	Std	6J	592	194	8.0	462	300	380 A A	245/40ZR18	97W	XL	8.5J	653	248	8.2	730	340	380 A A	
195/50R16	84V	Std	6J	602	201	8.0	500	300	380 A A	255/40ZR18	99W	XL	9J	661	260	8.5	775	340	380 A A	
205/50R16	87V	Std	6.5J	612	214	8.0	545	300	380 A A	225/40ZR19	93W	XL	8J	663	230	8.0	650	340	380 A A	
195/45R16	80V	Std	6.5J	582	195	8.0	450	300	380 A A	235/40ZR19	96W	XL	8.5J	671	241	8.2	710	340	380 A A	
205/45R16	83V	Std	7J	590	206	8.0	487	300	380 A A	245/40ZR19	98W	XL	8.5J	679	248	8.2	750	340	380 A A	
215/55R17	94V	Std	7J	668	226	8.0	670	300	380 A A	245/35ZR19	93W	XL	8.5J	655	248	8.2	650	340	380 A A	
225/55R17	101W	XL	7J	680	233	8.0	825	340	380 A A	295/30ZR19	100W	XL	10.5J	661	301	8.5	800	340	380 A A	
235/55R17	103W	XL	7.5J	690	245	8.2	875	340	380 A A	255/35ZR20	97W	XL	9J	686	260	8.5	730	340	380 A A	
205/50R17	89V	Std	6.5J	638	214	8.0	580	300	380 A A											
225/50R17	94W	Std	7J	658	233	8.0	670	300	380 A A											
235/50R17	100W	XL	7.5J	668	245	8.2	800	340	380 A A											
245/45ZR17	99W	XL	8J	652	243	8.2	775	340	380 A A											
255/45ZR17	102W	XL	8.5J	662	255	8.3	850	340	380 A A											
215/45ZR18	93W	XL	7J	651	213	8.0	650	340	380 A A											
225/45ZR18	95W	XL	7.5J	659	225	8.0	690	340	380 A A											
235/45ZR18	98W	XL	8J	669	236	8.2	750	340	380 A A											
255/45ZR18	103W	XL	8.5J	687	255	8.5	875	340	380 A A											

CF720 UHP



Applicable models



4+4 circumferential grooves
for excellent water drainage in wet conditions.

Flowing uni-directional tread design

on road driving considered high speed stability, off road driving, and strong traction. Given tough tread block.

Newly developed shoulder design

solve irregular wear problem and minimize noise level.

Silica tread compound

for better grip performance on both dry and wet surface.



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
305/45ZR22	118W	XL	10J	833	303	8.5	1320	340	420 A A
305/40ZR22	114W	XL	11J	803	313	8.5	1180	340	420 A A
265/35ZR22	102W	XL	9.5J	745	271	8.5	850	340	420 A A
245/30ZR22	92W	XL	8.5J	707	248	8.5	630	340	420 A A
295/35ZR24	110W	XL	10.5J	816	301	8.5	1060	340	420 A A
305/35ZR24	112W	XL	11J	824	313	8.5	1120	340	420 A A
255/30ZR24	97W	XL	9J	764	260	8.5	730	340	420 A A
295/30ZR26	107W	XL	10.5J	838	301	8.5	975	340	420 A A
305/30ZR26	109W	XL	11J	844	313	8.5	1030	340	420 A A
275/25ZR26	98W	XL	10J	798	283	8.5	750	340	420 A A

RF500 RUN-FLAT



Applicable models



Prevent irregular wear

newly developed directional tread design solved irregular wear.

Aggressive uni-directional tread design

for excellent water evacuation and reduces aquaplaning at high speed.

Variable pitch

combination on the shoulder blocks and siping on the tread surface for quiet riding.

Silica tread compound

for lower rolling resistance and excellent road holding.



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
205/55RF16	94W	XL	6.5	632	214	8.2	670	350	380 A A
225/55RF17	101W	XL	7.0	680	233	8.2	825	350	380 A A
225/50RF17	98W	XL	7.0	658	233	8.2	750	350	380 A A

CF600 HP

HIGH PERFORMANCE
NEW

Applicable models



Uni-directional tread design levels up symmetrical pattern design
for excellent water evacuation and reduces aquaplaning at high speed.

4 circumferential straight grooves

LEVEL UP

Prevent irregular wear
newly developed directional tread design solved irregular wear.

Variable pitch
combination on the shoulder blocks and siping on the tread surface for quiet riding.

Silica tread compound
for lower rolling resistance and lower fuel consumption.



★ LEVEL UP

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
★ 155/70R13	75T	Std	4.5	548	157	7.8	387	300	380 A A
★ 165/70R13	79T	Std	5.0	562	170	7.8	437	300	380 A A
★ 175/70R13	82H	Std	5.0	576	177	7.8	475	300	380 A A
★ 165/70R14	81H	Std	5.0	588	170	7.8	462	300	380 A A
★ 175/70R14	84H	Std	5.0	602	177	7.8	500	300	380 A A
★ 185/70R14	88H	Std	5.5	616	189	8.0	560	300	380 A A
215/70R15	91H	Std	6.0	630	201	8.0	615	300	380 A A
★ 195/70R14	98H	Std	6.5	683	221	8.2	750	300	380 A A
★ 175/65R14	82H	Std	5.0	584	177	7.8	475	300	380 A A
★ 185/65R14	86H	Std	5.5	596	189	8.2	530	300	380 A A
★ 175/65R15	84H	Std	5.0	609	177	7.8	500	300	380 A A
★ 185/65R15	88H	Std	5.5	621	189	8.2	560	300	380 A A
★ 195/65R15	91H	Std	6.0	635	201	8.2	615	300	380 A A
★ 205/65R15	94H	Std	6.0	647	209	8.2	670	300	380 A A
215/65R15	96H	Std	6.5	661	221	8.2	710	300	380 A A
★ 185/60R14	82H	Std	5.5	578	189	8.2	475	300	380 A A
★ 185/60R15	84H	Std	5.5	603	189	8.2	500	300	380 A A
★ 195/60R15	88H	Std	6.0	615	201	8.2	560	300	380 A A
★ 205/60R15	91H	Std	6.0	627	209	8.2	615	300	380 A A
215/60R15	94H	Std	6.5	639	221	8.2	670	350	380 A A
225/60R15	96V	Std	6.5	651	228	8.2	710	300	380 A A
★ 195/60R16	89H	Std	6.0	640	201	8.2	580	300	380 A A
★ 205/60R16	92V	Std	6.0	652	209	8.2	630	300	380 A A
215/60R16	95H	Std	6.5	664	221	8.2	690	300	380 A A
225/60R16	98V	Std	6.5	676	228	8.2	750	350	380 A A
235/60R16	100H	Std	7.0	688	240	8.2	800	300	380 A A

CF930 Winter HP



Applicable models



Special Y-style directional pattern design

Advanced silica compound



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)	Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max. Load (kg)	Max. Press (kPa)
				OD	SW	NSD							OD	SW	NSD		
165/70R13	79T	Std	5.0	562	170	8.4	437	300	225/55R16	99H	XL	7.0	654	233	8.7	775	340
165/70R14	81T	Std	5.0	588	170	8.4	462	300	215/55R17	98H	XL	7.0	668	226	8.7	750	340
175/70R14	88T	XL	5.0	602	177	8.4	560	340	225/55R17	101H	XL	7.0	680	233	8.7	825	340
185/70R14	88T	Std	5.5	616	189	8.5	560	300	195/50R15	82H	Std	6.0	577	201	8.7	475	300
175/65R14	82T	Std	5.0	584	177	8.4	475	300	205/50R17	93H	XL	6.5	638	214	8.7	650	340
185/65R14	86T	Std	5.5	596	189	8.5	530	300	225/50R17	98H	XL	7.0	658	233	8.7	750	340
175/65R15	84T	Std	5.0	609	177	8.4	500	300									
185/65R15	88T	Std	5.5	621	189	8.5	560	300									
195/65R15	91T	Std	6.0	635	201	8.7	615	300									
205/65R15	94T	Std	6.0	647	209	8.7	670	300									
185/60R14	82T	Std	5.5	578	189	8.5	475	300									
185/60R15	88H	XL	5.5	603	189	8.5	560	340									
195/60R15	88H	Std	6.0	615	201	8.7	560	300									
205/60R16	96H	XL	6.0	652	209	8.7	710	340									
215/60R16	99H	XL	6.5	664	221	8.7	775	340									
195/55R15	85H	Std	6.0	595	201	8.7	515	300									
195/55R16	91H	XL	6.0	620	201	8.7	615	340									
205/55R16	91T	Std	6.5	632	214	9	615	300									
215/55R16	97H	XL	7.0	642	226	8.7	730	340									

CF700 UHP



Applicable models 



CF500 HP



Applicable models 



Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
205/45ZR17	88W	XL	7.0	616	206	8.2	560	350	380 A A
215/45ZR17	91W	XL	7.0	626	213	8.2	615	350	380 A A
225/45ZR17	94W	XL	7.5	634	225	8.5	670	350	380 A A
235/45ZR17	97W	XL	8.0	644	236	8.5	730	350	380 A A
245/45ZR18	100W	XL	8.0	677	243	8.5	800	350	380 A A
245/45ZR19	102W	XL	8.0	703	243	8.5	850	350	380 A A
195/40ZR17	81W	XL	7.0	588	200	8.0	462	350	380 A A
205/40ZR17	84W	XL	7.5	596	212	8.5	500	350	380 A A
215/40ZR17	87W	XL	7.5	604	218	8.5	545	350	380 A A
245/40ZR17	95W	XL	8.5	628	248	8.5	690	350	380 A A
225/40ZR18	92W	XL	8.0	637	230	8.5	630	350	380 A A
235/40ZR18	95W	XL	8.5	645	241	8.5	690	350	380 A A
255/40ZR19	100W	XL	9.0	687	260	8.5	800	350	380 A A
275/40ZR19	105W	XL	9.5	703	278	8.5	925	350	380 A A
245/40ZR20	99W	XL	8.5	704	248	8.5	775	350	380 A A
215/35ZR18	84W	XL	7.5	607	218	8.5	500	350	380 A A
235/35ZR19	91W	XL	8.5	647	241	8.5	615	350	380 A A
225/35ZR20	90W	XL	8.0	666	230	8.5	600	350	380 A A
245/35ZR20	95W	XL	8.5	680	248	8.5	690	350	380 A A
275/35ZR20	102W	XL	9.5	700	278	8.5	850	350	380 A A
225/30ZR20	85W	XL	8.0	644	230	8.5	515	350	380 A A

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
185/55R15	82V	Std	6.0	585	194	8.2	475	350	380 A A
195/55R15	85V	Std	6.0	595	201	8.2	515	350	380 A A
205/55R15	88V	Std	6.5	607	214	8.2	560	350	380 A A
195/55R16	87V	Std	6.0	620	201	8.2	545	350	380 A A
205/55R16	94W	XL	6.5	632	214	8.2	670	350	380 A A
215/55R16	97W	XL	7.0	642	226	8.2	730	350	380 A A
225/55R16	99W	XL	7.0	654	233	8.2	775	350	380 A A
205/55R17	95W	XL	6.5	658	214	8.2	690	350	380 A A
215/55R17	98W	XL	7.0	668	226	8.2	750	350	380 A A
225/55R17	101W	XL	7.0	680	233	8.2	825	350	380 A A
235/55R17	103W	XL	7.5	690	245	8.2	875	350	380 A A
195/50R15	82V	Std	6.0	577	201	8.0	475	350	380 A A
205/50R15	86V	Std	6.5	587	214	8.0	530	350	380 A A
185/50R16	81V	Std	6.0	592	194	8.0	462	350	380 A A
195/50R16	84V	Std	6.0	602	201	8.0	500	350	380 A A
205/50R16	87W	Std	6.5	612	214	8.2	545	350	380 A A
225/50R16	92W	Std	7.0	632	233	8.2	630	350	380 A A
205/50R17	93W	XL	6.5	638	214	8.2	650	350	380 A A
215/50R17	95W	XL	7.0	648	226	8.2	690	350	380 A A
225/50R17	98W	XL	7.0	658	233	8.2	750	350	380 A A
195/45R15	82V	XL	6.5	557	195	8.0	475	350	380 A A

CF510 HP



Applicable models  



Wet Traction



Silence



Economy



High Mileage

CF610 HP



Applicable models 



Economy



Silence



Comfort



Wet Traction

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
185/70R13	86H	Std	5.5J	590	189	8.0	530	300	440 A A
185/70R14	88H	Std	5.5J	616	189	8.0	560	300	440 A A
195/70R14	91H	Std	6J	630	201	8.0	615	300	440 A A
205/70R14	95H	Std	6J	644	209	8.2	690	300	440 A A
215/70R14	96H	Std	6.5J	658	221	8.2	710	300	440 A A
185/65R14	86H	Std	5.5J	596	189	8.2	530	300	440 A A
195/65R14	89H	Std	6J	610	201	8.2	580	300	440 A A
185/60R14	82H	Std	5.5J	578	189	8.2	475	300	440 A A
195/60R14	86H	Std	6J	590	201	8.2	530	300	440 A A
205/70R15	96H	Std	6J	669	209	8.2	710	300	440 A A
215/70R15	98H	Std	6.5J	683	221	8.2	750	300	440 A A
185/65R15	88H	Std	5.5J	621	189	8.2	560	300	440 A A
195/65R15	91H	Std	6J	635	201	8.2	615	300	440 A A
205/65R15	94H	Std	6J	647	209	8.2	670	300	440 A A
215/65R15	96H	Std	6.5J	661	221	8.2	710	300	440 A A
185/60R15	84H	Std	5.5J	603	189	8.2	500	300	440 A A
195/60R15	88H	Std	6J	615	201	8.2	560	300	440 A A
205/60R15	91V	Std	6J	627	209	8.2	615	300	440 A A
215/60R15	94H	Std	6.5J	639	221	8.2	670	300	440 A A
225/60R15	96V	Std	6.5J	651	228	8.2	710	300	440 A A
185/55R15	82V	Std	6J	585	194	8.0	475	300	440 A A
195/55R15	85V	Std	6J	595	201	8.2	515	300	440 A A
205/55R15	88V	Std	6.5J	607	214	8.2	560	300	440 A A
195/50R15	82V	Std	6J	577	201	8.0	475	300	440 A A
205/50R15	86V	Std	6.5J	587	214	8.2	530	300	440 A A
195/60R16	89H	Std	6J	640	201	8.2	580	300	440 A A
205/60R16	92V	Std	6J	652	209	8.2	630	300	440 A A
215/60R16	95V	Std	6.5J	664	221	8.2	690	300	440 A A
225/60R16	98H	Std	6.5J	676	228	8.2	750	300	440 A A
235/60R16	100H	Std	7J	688	240	8.2	800	300	440 A A
205/55R16	91V	Std	6.5J	632	214	8.2	615	300	440 A A

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG
				OD	SW	NSD			
165/70R13	79T	Std	5	562	170	7.8	437	300	440 A A
175/70R13	82T	Std	5	576	177	7.8	475	300	440 A A
165/65R13	77T	Std	5	544	170	7.8	412	300	440 A A
165/70R14	81H	Std	5	588	170	7.8	462	300	440 A A
175/70R14	84H	Std	5	602	177	7.8	500	300	440 A A
175/65R14	82H	Std	5	584	177	7.8	475	300	440 A A
165/55R14	72H	Std	5	538	170	7.8	355	300	440 A A
175/65R15	84H	Std	5	609	177	7.8	500	300	440 A A
165/60R15	77H	Std	5	579	170	7.8	412	300	440 A A
165/55R15	75V	Std	5	563	170	7.8	387	300	440 A A

CF300 Commercial/VAN

Sports K4 HP



Applicable models

Features:

- Economy
- Handling
- Wet Traction
- Braking
- High Mileage



Applicable models

Features:

- Economy
- Handling
- Silence
- Comfort

Product Detail

Size // LI/SS	PR	Rim	Dimensions (mm)		Max.Load(kg)		Max.Press (kPa)	
			OD	SW	Single	Dual		
185R14C 8PR	102/100Q	8PR	5.5	650	188	850	800	450
185R14C 8PR	102/100Q	8PR	5.5	650	188	850	800	450
195R14C 8PR	106/104Q	8PR	5.5	666	198	950	900	450
195R14C 8PR	106/104Q	8PR	5.5	666	198	950	900	450
205R14C 8PR	107/105R	8PR	6.0	693	196	975	925	450
195R15C 8PR	106/104R	8PR	5.5	693	196	950	900	450
195R15C 8PR	106/104R	8PR	5.5	693	196	950	900	450
205/75R14C 8PR	109/107R	8PR	5.5	664	203	1030	975	475
205/75R15C 8PR	110/108R	8PR	5.5	689	203	1060	1000	475
185/75R16C 8PR	104/102R	8PR	5.0	684	184	900	850	475
195/75R16C 8PR	107/105R	8PR	5.5	698	196	975	925	475
205/75R16C 8PR	110/108R	8PR	5.5	714	203	1060	1000	450
225/75R16C 10PR	121/120R	10PR	6.0	744	223	1450	1400	575
195/70R15C 8PR	104/102R	8PR	6.0	655	201	900	850	450
205/70R15C 8PR	106/104R	8PR	6.0	669	209	950	900	450
225/70R15C 8PR	112/110R	8PR	6.5	697	228	1120	1060	450
195/65R16C 8PR	104/102R	8PR	6.0	660	201	900	850	475
205/65R16C 8PR	107/105T	8PR	6.0	672	209	975	925	475
215/65R16C 8PR	109/107T	---	6.5	686	221	1030	975	475
225/65R16C 8PR	112/110T	---	6.5	698	228	1120	1060	475
235/65R16C 8PR	115/113T	---	7.0	712	240	1215	1150	475

Product Detail

Size // LI/SS	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)	UTQG	
		OD	SW	NSD				
185/75R14	89H	5.0	634	184	7.3	580	300	380 A A
155/65R14	75S	4.5	558	157	7.2	387	300	380 A A
165/65R14	79S	5.0	570	170	7.2	437	300	380 A A
165/65R15	81H	5.0	595	170	7.2	462	300	380 A A
165/60R14	75H	5.0	554	170	7.2	387	300	380 A A
155/60R15	74H	4.5	567	157	7.2	375	300	380 A A
165/60R15	77H	5.0	579	170	6.8	412	300	380 A A
175/60R15	81H	5.0	591	177	7.1	462	300	380 A A
165/55R14	72V	5.0	538	170	6.8	355	300	380 A A
165/55R15	75V	5.0	563	170	6.8	387	300	380 A A
175/55R15	77V	5.5	573	182	7.2	412	300	380 A A
165/50R15	73V	5.0	547	170	6.8	365	300	380 A A
165/50R16	75V	5.0	572	170	6.8	387	340	380 A A
165/45R15	68V	5.5	529	165	6.8	315	300	380 A A
165/45R16	74V	5.5	554	165	6.8	375	340	380 A A
165/40R16	73V	6.0	538	170	6.8	365	340	380 A A

CF950 Winter SUV




Applicable models



CF970 Winter Studdable



Applicable models

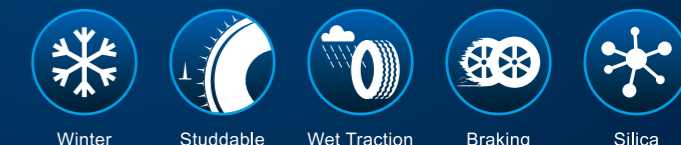

Product Detail



Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
				OD	SW	NSD		
215/70R16	100T	Std	6.5	708	221	8.7	800	300
245/70R16	111T	XL	7.0	750	248	9.2	1090	340
215/65R16	98H	Std	6.5	686	221	8.7	750	300
225/65R17	106H	XL	6.5	724	228	8.7	950	340
235/65R17	108H	XL	7.0	738	240	9.5	1000	340
265/65R17	112T	Std	8.0	776	272	9.2	1120	300
215/60R17	96H	Std	6.5	690	221	8.7	710	300
225/60R17	99H	Std	6.5	702	228	9.0	775	300
235/60R17	102H	Std	7.0	714	240	9.2	850	300
235/60R18	108H	XL	7.0	739	240	9.2	975	340
255/55R18	109H	XL	8.0	737	265	9.2	1030	340
255/50R19	107V	XL	8.0	739	265	9.2	975	340
225/45R17	94H	XL	7.5	634	225	9	670	340
245/45R18	100V	XL	8.0	677	243	9.2	800	340
225/40R18	92V	XL	8.0	637	230	9	630	340






Product Detail

Size	LI/SS	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
			OD	SW	NSD	Single	Dual	
195/65R15	91T	6.0	635	201	10.2	615	—	300
185/75R16C 8PR	104/102R	5.0	684	184	10.5	900	850	475

CF900 Winter HP









Applicable models  

 Winter
  Silence
  Comfort
  Wet Traction
  Silica

CF350 Commercial/VAN



Applicable models 

 Economy
  Silence
  Comfort
  High Mileage
  Wet Traction

Product Detail

Size	LI/SS	Std/XL	Rim	Dimensions (mm)			Max.Load (kg)	Max.Press (kPa)
				OD	SW	NSD		
185/65R14	86T	Std	5.5	596	189	9.3	530	300
185/65R15	88T	Std	5.5	621	189	9.3	560	300
195/65R15	91T	Std	6.0	635	201	9.3	615	300
205/65R15	94T	Std	6.0	647	209	9.3	670	300
215/65R16	98T	Std	6.5	686	221	9.3	750	300

Product Detail

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load (kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
155R13C	90/88S	8PR	4.5	578	157	10.0	600	560	450
165R13C	94/93S	8PR	4.5	594	165	10.0	670	650	450
165R14C	96/95S	8PR	4.5	620	165	10.0	710	690	450
175R13C	97/95S	8PR	5.0	610	177	10.0	730	690	450
175/75R16C	101/99R	8PR	5.0	668	177	9.0	825	775	475
215/75R16C	116/114S	8PR	6.0	728	216	9.0	1250	1180	525
165/70R13C	88/86S	6PR	5.0	562	170	10.0	560	530	375
165/70R14C	84/80S	6PR	5.0	588	170	10.0	500	450	350
175/70R14C	98/96S	8PR	5.0	602	177	10.0	750	710	450
185/70R14C	102/100S	8PR	5.5	616	189	10.0	850	800	450
175/65R14C	90/88T	6PR	5.0	584	177	10.0	600	560	375
205/65R15C	102/100T	6PR	6.0	647	209	9.0	850	800	375
215/60R16C	108/106T	8PR	6.5	664	221	9.0	1000	950	475
215/60R17C	109/107T	8PR	6.5	690	221	9.0	1030	975	475
235/60R17C	117/115T	10PR	7.0	714	240	9.0	1285	1215	525

CF360 Winter Commercial/VAN

Quality Insurance



Applicable models

- Winter
- Braking
- Wet Traction
- High Mileage
- Silica


Product Detail

Size	LI/SS	PR	Rim	Dimensions (mm)			Max.Load(kg)		Max.Press (kPa)
				OD	SW	NSD	Single	Dual	
185R14C	102/100R	8PR	5.5	650	188	10.0	850	800	450
215/75R14C	112/110R	8PR	6.0	678	216	10.0	1120	1060	475
185/75R16C	104/102R	8PR	5.0	684	184	9.0	900	850	475
195/75R16C	107/105R	8PR	5.5	698	196	9.5	975	925	475
195/70R15C	104/102R	8PR	6.0	655	201	9.5	900	850	450
215/70R15C	109/107R	8PR	6.5	683	221	9.5	1030	975	450
225/70R15C	112/110R	8PR	6.5	697	228	9.5	1120	1060	450
195/65R16C	104/102R	8PR	6.0	660	201	9.5	900	850	475
205/65R16C	107/105R	8PR	6.0	672	209	9.5	975	925	475
215/65R16C	109/107R	8PR	6.5	686	221	9.5	1030	975	475
235/65R16C	115/113R	8PR	7.0	712	240	9.5	1215	1150	475

All Tire Made By Shandong New Continent Tire Co., Ltd.
Is Insured By CPIC

DESCRIPTION OF OPERATION/
LOCATIONS/VEHICLES/
SPECIAL ITEMS

**2004 ISO CG 00 38 12 04
Claim Made Policy**
Retrospective Date: July 31, 2014
Jurisdiction/Territory Worldwide
Including U.S.A/canada
Products Covered: Passenger
Car Radial Tires(Pcr),
Commercial/van And Light
Truck Radial Tires(Ltr)

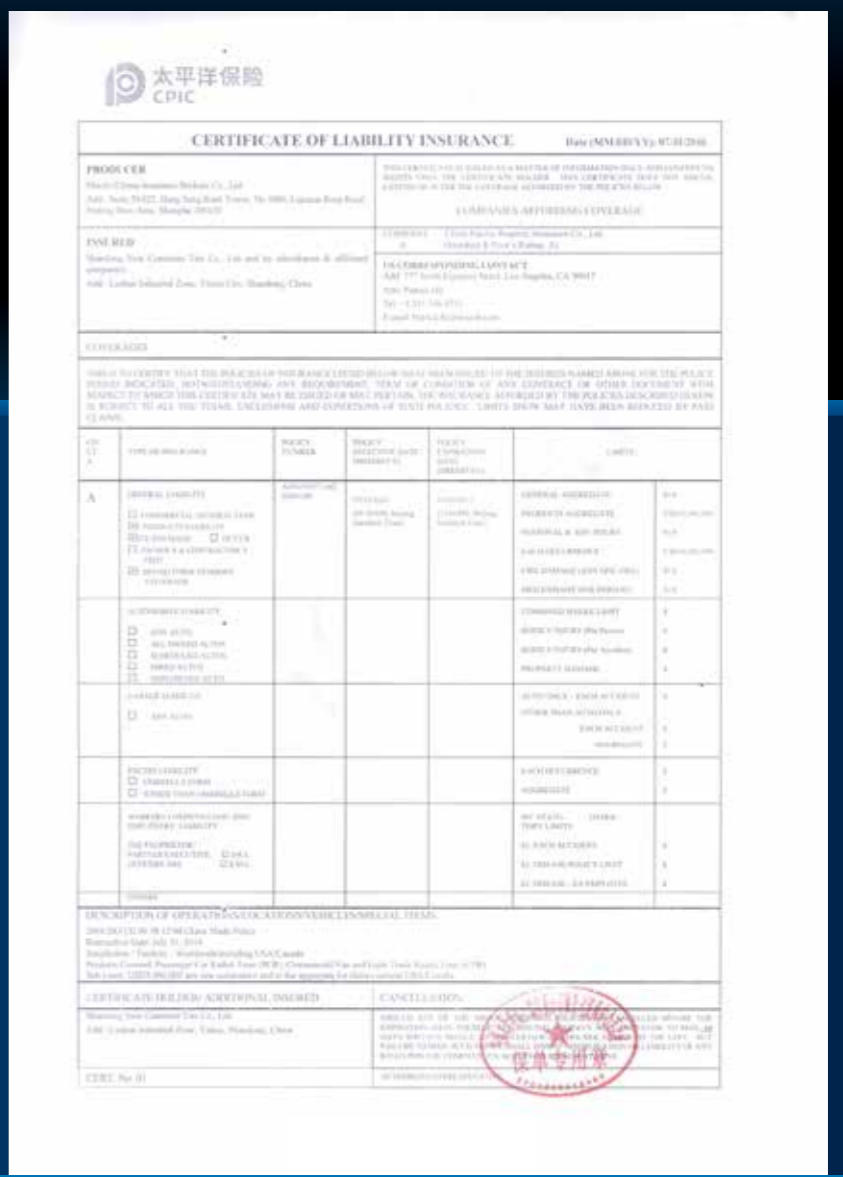

SPECIFICATION TAG & MARKING METHOD

TAG detail

Tire Brand Comforser

Specification 245/45ZR18 100W

Series CF700

245 / 45 ZR 18 100 W

245 Section Width	ZR/Z means Speed Over 240km/h	100=LI
45 Section Width		W=SS 18= RIM (inch)

SAFE&ECO DRIVING

- Safety Driving**
Please obey the traffic laws and regulations, keep cautious and respect the other drivers and pedestrians.
- Eco Driving**
The idea of "Green and Environment" is always recommended, and the advice below will save maintenance costs, extend service life of tire and save fuel.

TIRE USAGE

- Tire Maintenance**
For the sake of safety, you should check the tire regularly at least once a month. Be cautious about the damage and uneven wear, tire pressure abnormality, positioning, balance or suspension failure will affect overall tire performance and cause danger. Tire is the only contact surface between vehicles and ground, and it should be in a good condition.
- | | |
|--|--|
| <ul style="list-style-type: none"> Check the tire pressure regularly, especially before long time driving. If tire is incorrectly inflated, it will lead to increase of rolling resistance and extra fuel consumption. | <ul style="list-style-type: none"> Faster driving speed will result in greater air resistance so as to increase fuel consumption. |
| <ul style="list-style-type: none"> Keep smooth driving will avoid abrupt acceleration and sudden braking. | <ul style="list-style-type: none"> Convert to higher gear as soon as possible to prevent the engine running fast at lower gear. |
| <ul style="list-style-type: none"> Use air conditioner properly. If you don't need it, turn off all electrical equipment, for example the electrically heated rear window. | <ul style="list-style-type: none"> Get ready for starting the engine. Switch off the engine if you predict the car will park longer than a few minutes. |
| <ul style="list-style-type: none"> Check the wheel positioning and wheel camber angle by professional tire maintenance personnel regularly, and make sure that the car running smoothly and stably, which is an important factor for fuel saving. | |

Speed

Speed symbol indicates the maximum travel speed that the tire can achieve under stated condition.

SS	Maximum Speed (km/h)
L	120
Q	160
S	180
T	190
H	210
V	240
W	270
Y	300
* ZR	over 240km/h

* ZR means a certain range of speed

Maximum speed refers to the speed that the tire can achieve on flat road after normal installation.

Loading Index

Load index refers to numeral value of tire's maximum load ability under stated condition.

LI	loading capacity	LI	loading capacity	LI	loading capacity	LI	loading capacity
60	250	76	400	91	615	106	950
61	257	77	412	92	630	107	975
62	265	78	425	93	650	108	1000
63	272	79	437	94	670	109	1030
64	280	80	450	95	690	110	1060
65	290	81	462	96	710	111	1090
66	300	82	475	97	730	112	1120
67	307	83	487	98	750	113	1150
68	315	84	500	99	775	114	1180
69	325	85	513	100	800	115	1215
70	335	86	530	101	825	116	1250
71	345	87	545	102	850	117	1285
72	355	88	560	103	875	118	1320
73	365	89	580	104	900	119	1360
74	375	90	600	105	925	120	1400
75	387						

Tire Rotation

Tire rotation is a simple and effective way to prolong tire service life through balancing degree of wear.

